


Ever Strong Aluminum Cantilever Chain Link Gate

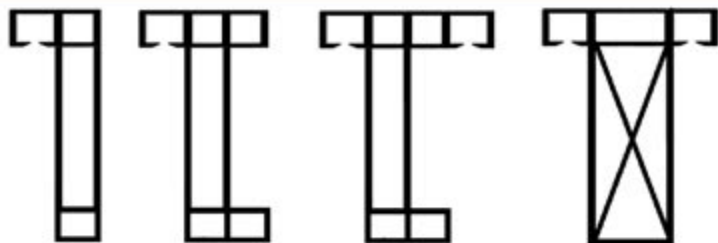

Single Track Single Gate 3' to 22'
 Single Track Single Gate Strengthened 23' to 30'
 Dual Track Single Gate 23' to 30'
 Box Frame

Ever Strong aluminum cantilever Chain link gate we custom manufacturers each gate to your opening and Ever Strong have four stander color black, green, bronze and white. We offer specification and design assistance architects, engineers, land planners, and project designers for various types of projects. Some of these projects include airports, correctional facilities, port authority projects, sporting venues, military installations, power plant facilities and utilities.

Ever Strong Aluminum Gate Specifications

- Gate Frames:** Shall be fabricated in accordance with ASTM F 1184, Class 2. Vertical frame members shall be 2-inch square aluminum, with a .125" wall thickness and weighing 1.1 lbs./ft. Bottom frame member shall be 2 inch aluminum, with a .125" wall thickness and the frame member shall be a one-piece aluminum extrusion, Aluminum alloy used shall be 6063-T6 only. Intermediate uprights shall be 2-inch square aluminum spaced equally at no more than 7 feet o.c. subdividing the gate frame into panels. All members shall be welded to form a rigid one-piece gate frame unit.
- Fabric Filler:** Shall match fence and be attached to the frame by means of hook bolts. Fabric shall be attached between each internal upright with hook bolts spaced no more than 15 inches o.c. as recommended by the manufacturer.
- Trussing:** Each bay shall be cross-trussed by means of 1/4" cable and adjustable turnbuckles bolted to corner gussets. Cable trussing will maintain the structural integrity of the gate while allowing for expansion and contraction of aluminum during various weather conditions.
- Truck Assemblies:** Shall be swivel type, zinc die cast, with six (6) factory sealed and lubricated ball bearing rollers. Four vertical rollers shall be 2 inches in diameter x 9/16-inch in width and two ball-bearing zinc plated steel side rollers to prevent lateral movement. Truck assemblies shall be mounted on post brackets using 7/8-inch diameter Clevis bolts with a 9/16-inch shank.
- Bottom Guide Wheel Assemblies:** Two 3 inch diameter rubber wheels (one set) straddling the bottom horizontal gate rail shall be installed, one set on the gate post and one on the overhang post.
- Stop Bracket / End Plug:** After gate has been installed, both ends of the combination track/frame member shall be closed off.
- Hardware:** Gate hangers, latches, brackets, guide assemblies and stops shall be steel, galvanized after fabrication. A positive latch device shall be provided with provisions for padlocking.
- Posts:** Gate posts, latch posts and overhang posts shall be 4 inches O.D. Schedule 40 galvanized pipe set in 12 inches x 36 inches deep footings or as recommended by the manufacturer. Concrete shall be troweled and sloped to shed water away from the posts.
- Style:** Style of gate frame shall be single, dictated by size of opening as recommended by manufacturer.



B&H Wholesale Fence Co, LLC.

Manufacturers / Wholesalers

Phone: (800) 477-2060

Phone: (518) 346-8515

Fax: (518) 346-8518

WWW.BNHFENCE.COM

"Suppliers to the Trade Only"



Professional Fence Dealer:



B&H Wholesale Fence

Manufacturers/Wholesalers

WWW.BNHFENCE.COM

Ever Strong Chain Link Fence Residential, Commercial, Industrial application is one of the most cost effective ways to secure your property. Galvanized and all color coated chain link. Ever Strong color black, green, bronze and white and Available in 1 1/4" mesh to meet BOCA swimming pool code.



Black



White



Green



Bronze

<u>FABRIC</u>	Cantilever Latch	Gate Clips	Saddle Clamps
PVC Coated Chain Link	Cantilever Rollers	Gate Corner	Scrolls
Galvanized Fabric	Cantilever Roller Guard Kit	Hinges, Industrial	Sleeves
<u>PIPE & TUBE</u>	Chain, Coil Spring Wire	Hinges, Residential	Speed rail Fittings
Residential Weight	Corner Barb Arms	Hog Rings	Sta-Klos
SS15, SS20, SS40	Collars	Latches, Kennel	Straight Wire
Standard weight pipe	Overhead Slide Gate	Line Post Top	Swing Gate Wheels
<u>FITTINGS</u>	Drop Fork Brackets	Locking Device, Industrial	Tension Bars
Anchors fabric	Drop Rods	Oar Locks	Ties
Auto Latch	End Clamps	Post Caps	Truss Rods
Barb Arms Barb Wire	Front end Ground Rollers	Razor Ribbon	<u>GATE</u>
Carriage Bolts	Fork Latches	Residential Locking Device	Single, Double Drive Gates
Boulevard Clamps	Floor Flanges	Rail End	Cantilever Gates
Brace Bands	Gate Center Stop	Rolling Gate Kits	Kennels and Enclosures

